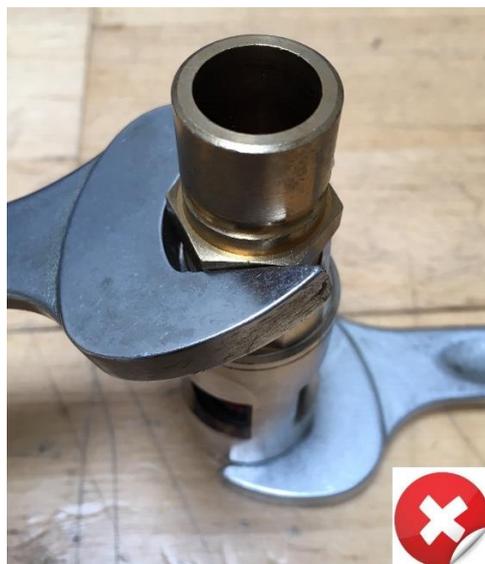

User Guide

Flow Indicator

The maximum torque necessary to assemble CFV is 25 Nm. Do not exceed 25 Nm.

It is advised to use thread locker instead of Teflon coating as sealant.





Change log

Date of change	Change	Version
04-09-2019	New	001