

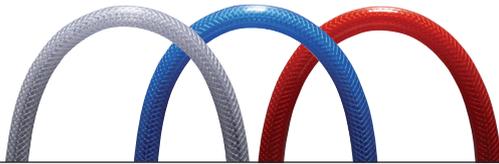


HOSES

MATERIAL PVC



Part No.	D1	D	L (m)	Colour	Working Pressure (Bar)	Burst Pressure (Bar)	Bend Radius	
P10T	10	16	30	○	17	51	65	1
P10B	10	16	30	●	17	51	65	1
P10R	10	16	30	●	17	51	65	1
P13T	13	19	30	○	15	45	85	1
P13B	13	19	30	●	15	45	85	1
P13R	13	19	30	●	15	45	85	1
P19T	19	26	30	○	10	30	125	1
P19B	19	26	30	●	10	30	125	1
P19R	19	26	30	●	10	30	125	1

Tube:

Transparent soft PVC hose for low temperature water and air.

Reinforcement:

High-strength PES fiber.

Cover:

Clear, blue or red transparent soft PVC.
Resistant to abrasion, ozone, and weather.

Applications:

Flexible hose designed for cold water for mould temperature controlling.

Temperature range:

Working temperature: Up to +60°C (+140°F)
Peak up to +90°C (+194°F).

Note: Lifetime of this hose will be substantially reduced if operating temperatures exceed +60°C (+140°F).

Tolerances:

UNI EN ISO 1307/97 tolerances for inside diameters up to and including 25 mm.

On inside diameter:

For I.D. 5.1 up to 20 mm ± 0.80 mm.
Length tolerance: $\pm 1\%$.